


17-4 PH Stainless Steel

| Composition | Amount |
|-------------|------------|
| Chromium | 15-17.5% |
| Nickel | 3-5% |
| Copper | 3-5% |
| Silicon | 1% max |
| Manganese | 1% max |
| Niobium | 0.15-0.45% |
| Carbon | 0.07% max |
| Phosphorous | 0.04% max |
| Sulfur | 0.03% max |
| Iron | bal |

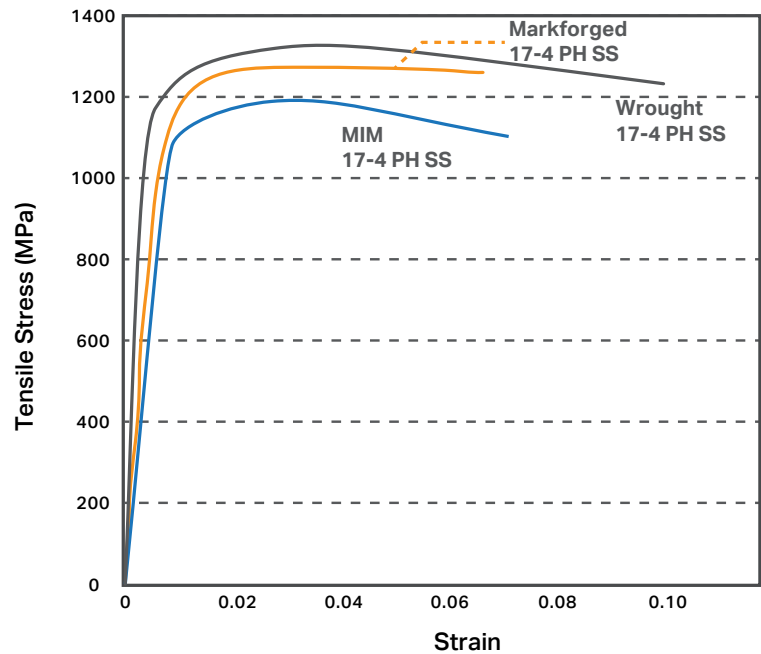

● Markforged H900 Heat Treated




17-4 PH stainless steel processed with the Markforged Metal X system heat treated to H900 specification.

● MIM H900 Heat Treated

17-4 PH MIM standard stainless steel heat treated to H900 specification.

● ASTM A564 H900 Heat Treated

ASTM A564 17-4 PH stainless steel heat treated to H900 specification.

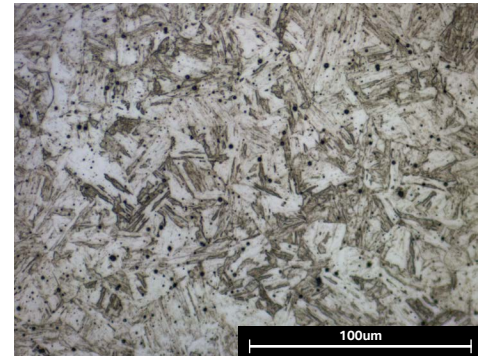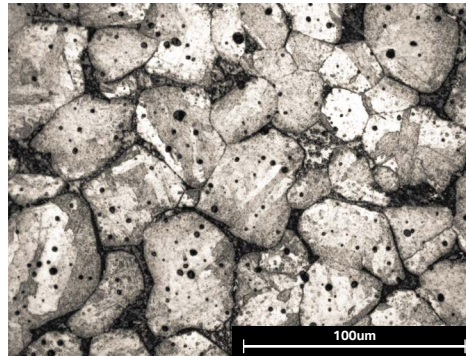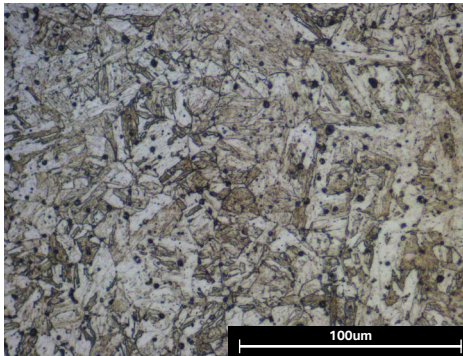

| Typical Mechanical Properties | Standard | Markforged H900 | MIM H900 | ASTM A564 H900 |
|-------------------------------|------------|-----------------|----------|----------------|
| Ultimate Tensile Strength | ASTM E8 | 1250 MPa | 1190 MPa | 1310 MPa |
| 0.2% Yield Strength | ASTM E8 | 1100 MPa | 1090 MPa | 1170 MPa |
| Elongation at Break | ASTM E8 | 6% | 6% | 10% |
| Tensile Modulus | ASTM E8 | 170 GPa | 190 GPa | 190 GPa |
| Hardness | ASTM E18 | 36 HRC | 33 HRC | 40 HRC |
| Corrosion | ASTM F1089 | Pass | Pass | Pass |
| Relative Density | ASTM B923 | 96% | 95.5% | 100% |

All data and graphs on front page reflect values of H900 heat treated 17-4 PH SS. Markforged represent typical tested values, while MIM H900 and Wrought H900 represent typical reference values from MPIF Standard 35. For values of Markforged printed 17-4 PH SS as-sintered and with H1150 heat treatment, please see the reverse side. All composition and "As-Sintered" data verified by a third party test facility. All microstructure images etched and photographed at Markforged.

17-4 PH Stainless Steel

Values listed below compare Markforged samples processed in three different ways: As-Sintered, heat treated to H900 standard, and heat treated to H1150 standard.

| Typical Mechanical Properties | Standard | As Sintered | H900 | H1150 |
|-------------------------------|------------|-------------|----------|---------|
| Ultimate Tensile Strength | ASTM E8 | 1050 MPa | 1250 MPa | 950 MPa |
| 0.2% Yield Strength | ASTM E8 | 800 MPa | 1100 MPa | 880 MPa |
| Elongation at Break | ASTM E8 | 5% | 6% | 10% |
| Tensile Modulus | ASTM E8 | 140 GPa | 170 GPa | 170 GPa |
| Hardness | ASTM E18 | 30 HRC | 36 HRC | 32 HRC |
| Corrosion | ASTM F1089 | Pass | Pass | Pass |
| Relative Density | ASTM B923 | 96% | 96% | 96% |